

# Manual Blast Gate, Stainless Steel 3240




ID In.	Ends	"A" Height Closed (in.)	"B" Height Opened (in.)	Stainless Steel			Stainless Steel Collars Only			
				"C" Width (in.)	"D" Depth (in.)	"E"	22ga	20ga	18ga	
3	QF	6.50	9.13	5.00	5.38	2.75	Std			
4	QF	7.75	11.50	6.00	5.50	3.00				
5	QF	10.50	14.75	7.00	5.50	3.50				
6	QF	11.13	16.75	8.00	5.50	4.00				
7	QF	12.13	18.75	9.00	5.25	4.50				
8	QF	13.63	21.13	10.00	5.25	5.00				
9	QF	15.13	24.00	11.00	5.50	5.50				
10	QF	17.13	26.75	12.00	5.25	6.00				
11	QF	19.13	28.75	13.00	5.50	6.50				
12	QF	20.38	32.13	14.00	5.00	7.00				
14	QF	23.25	36.75	16.00	5.00	8.00	Optional			
16	QF	26.25	40.75	18.00	5.00	9.00				
18	QF	29.25	44.75	20.00	5.00	10.00				
20	QF	32.25	48.75	22.00	5.00	11.00				
22	QF	35.25	52.75	24.00	5.00	12.00				
24	QF	38.25	56.75	26.00	5.00	13.00				
26	AF	41.25	60.75	28.00	5.75	14.00				
28	AF	44.25	64.75	30.00	5.75	15.00				
30	AF	47.25	68.75	32.00	5.75	16.00				

Ends: QF = Quick Fit Rolled Edges | AF = Angle Flange

**Construction**

- SS Collars are fully welded to SS body.
- Body and blade are 12ga.

Ends: Standard QF end can be changed to Raw ID (RAWID), Raw OD (RAWOD), No Fitting (NF), Hose Adapter (RAWFLEX), Flat Flange (FFL), Angle Flange (ANGFL), or Van Stone (VANSTONE).

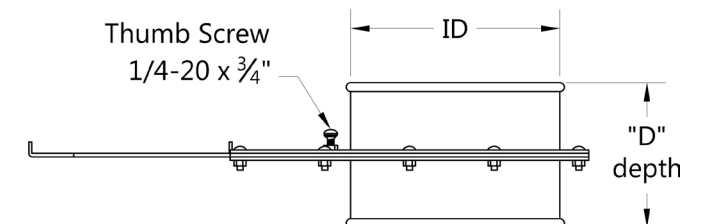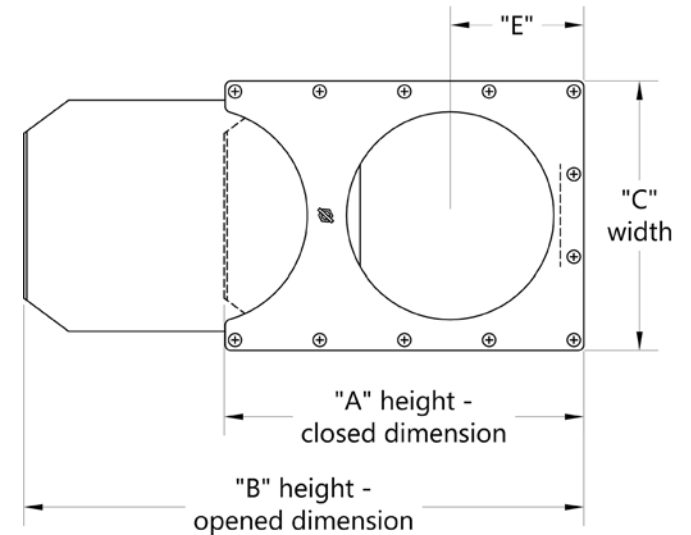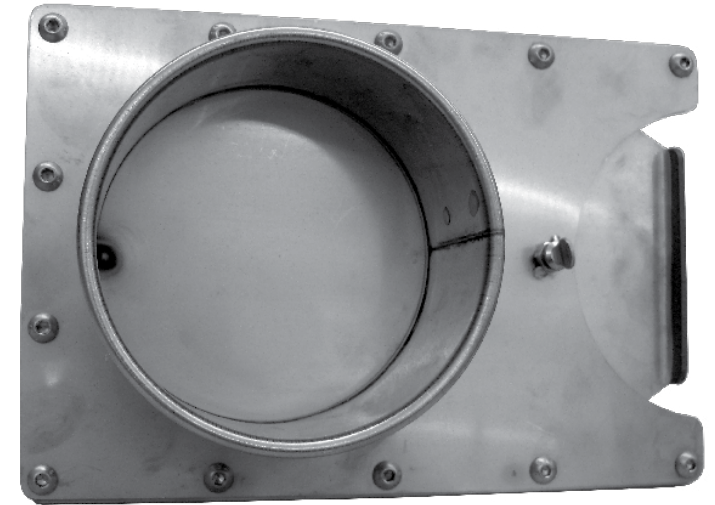



# Manual Blast Gate, Stainless Steel 3240

TECHNICAL  
DATA

Temperature Rating of Product Components	
° F	QF Manual Blast Gate
1100°	Stainelss Steel
0°	
-40°	
-60°	

Additional Notes
304SS: <ul style="list-style-type: none"> <li>bluing may occur at 800° F and above</li> </ul>

Compliance / Rating of Product Components		
Product	Material	Compliance / Rating
QF Manual Blast Gate	304SS	Finish meets ASTM A240
	316SS	Finish meets ASTM A240

